SVY Mold machining (Φ1.2, 2.0)

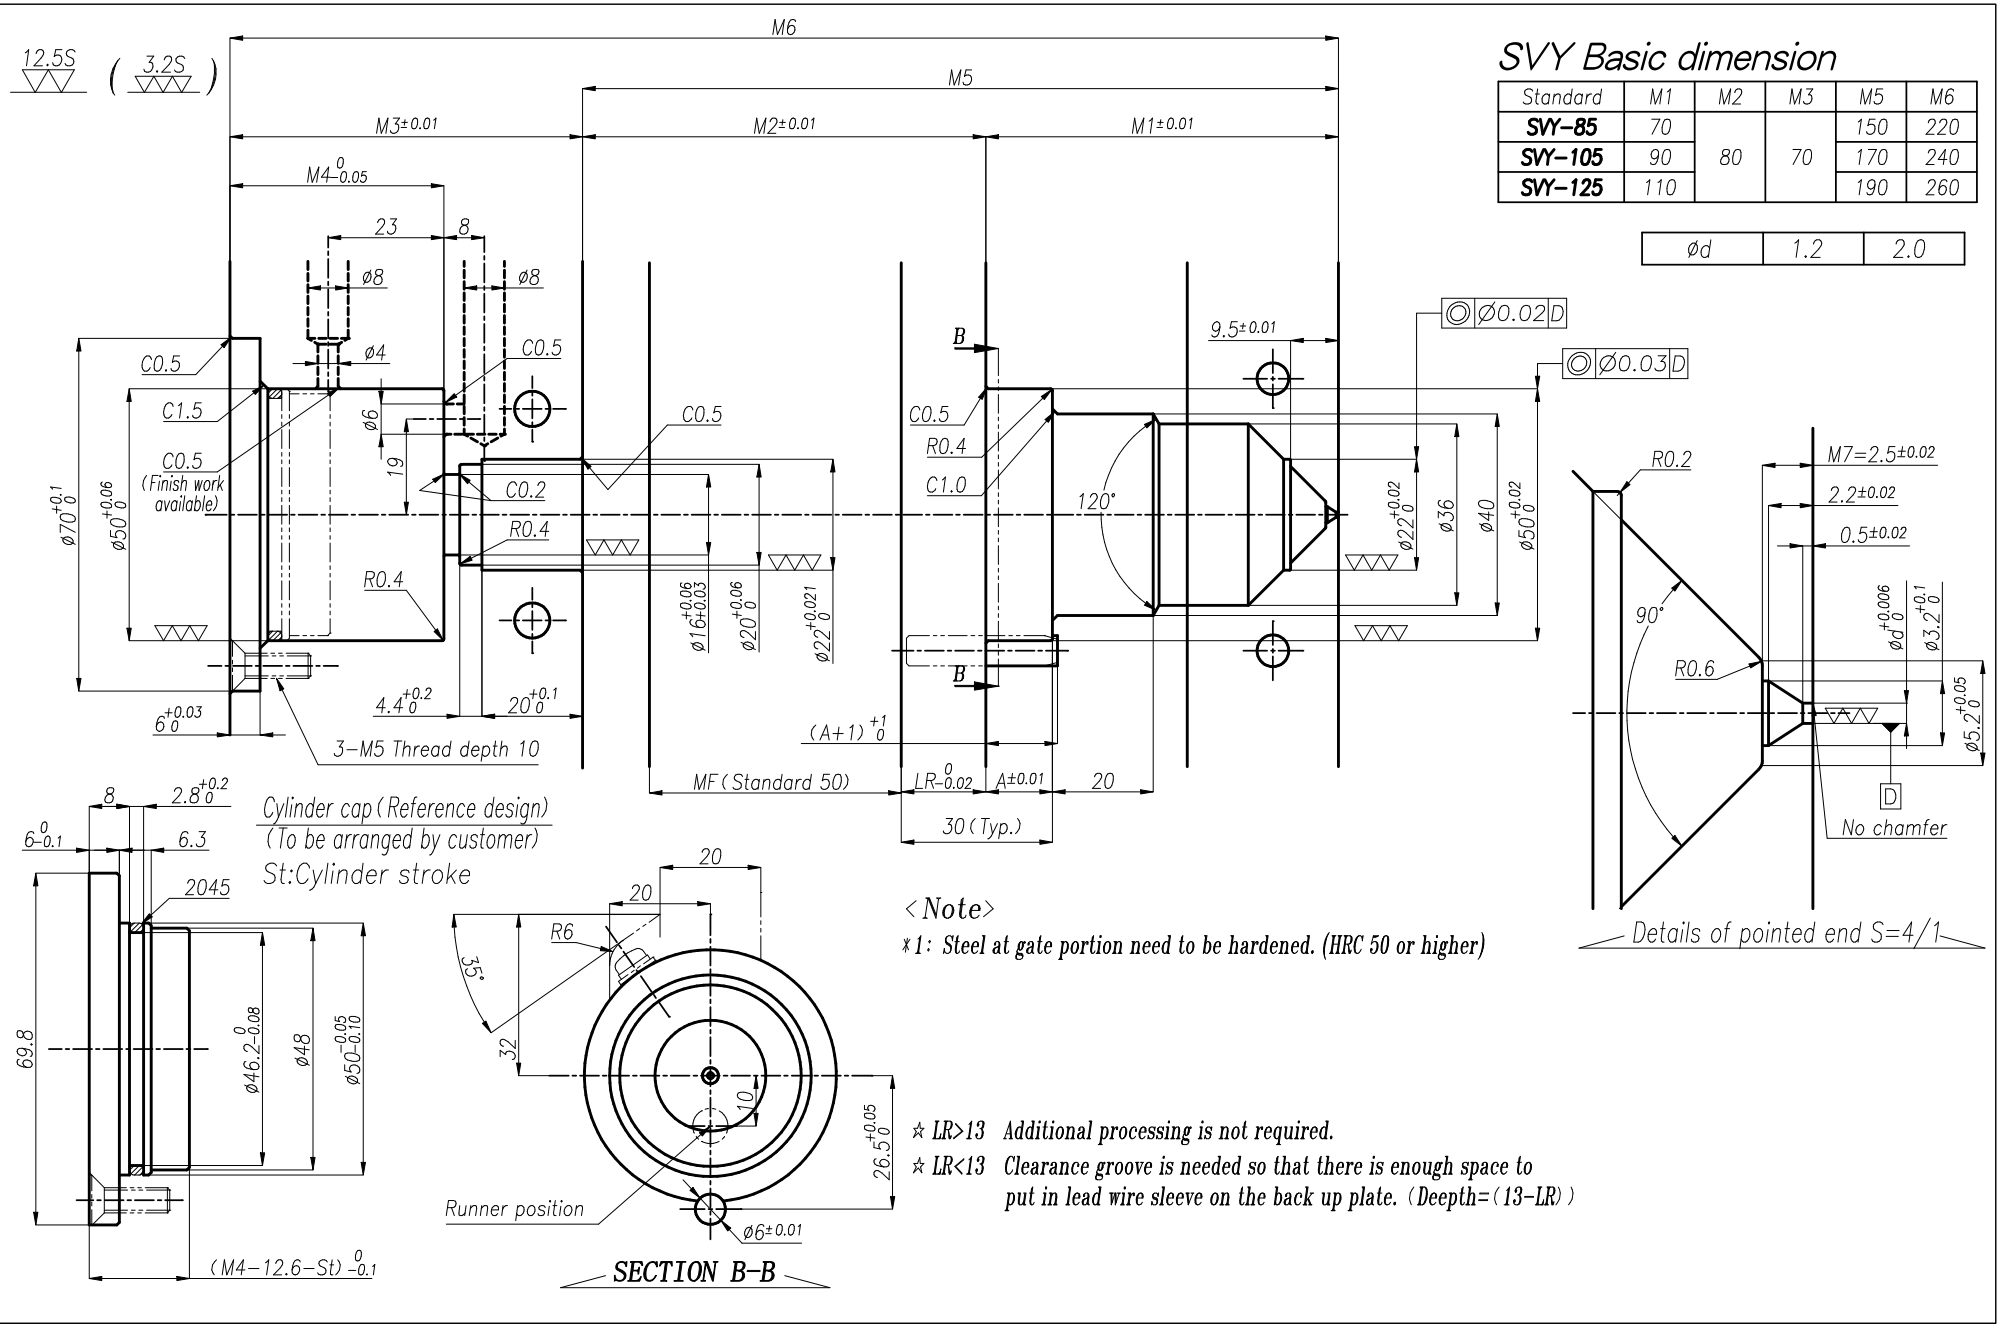

SVY Basic dimension

Standard	M1	M2	M3	M5	M6
SVY-85	70	80	70	150	220
SVY-105	90			170	240
SVY-125	110			190	260

Ød	1.2	2.0

<Note>

*1: Steel at gate portion need to be hardened. (HRC 50 or higher)

☆ LR>13 Additional processing is not required.

☆ LR<13 Clearance groove is needed so that there is enough space to put in lead wire sleeve on the back up plate. (Deepth=(13-LR))

SEIKI VALVE & SPEAR SYSTEM